


# MODEL "FL"

## with Exterior Operated Damper

### EXTRUDED ALUMINUM BRICK VENTS

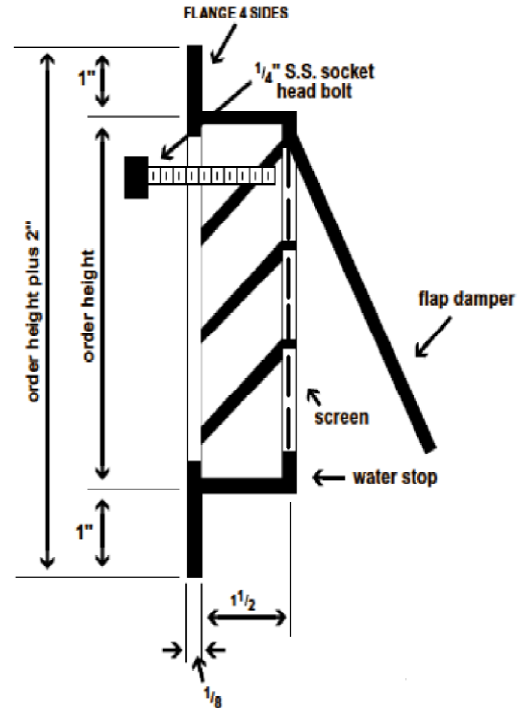

QTY	MODEL #	ORDER SIZE	FINISHED DIMENSIONS (+1/4" to order size width for mechanical fasteners)	MINIMUM OPENING REQUIRED

- Extruded aluminum, 6063 - T5 Alloy. Minimum .125" thick.
- Blades are 1" deep, set at 45° angles, 1" on center.
- For any unit over 30" wide - do not mortar jamb sections.
- Damper is manually operable from the exterior of the vent with an Allen wrench.

**FINISH:**

**SCREENS:** 18 X 14 aluminum mesh

<b>SUNVENT INDUSTRIES</b> By SYLRO SALES CORP. 1 Industrial Drive, #26 Pelham NH, 03076 Toll Free: 1-800-325-4115 In NH: 603-595-4556 Fax: 603-595-4778 www.sunventindustries.com info@sunventindustries.com	<b>PROJECT:</b>	
	<b>LOCATION:</b>	
	<b>ARCHITECT:</b>	
	<b>CONTRACTOR:</b>	<b>JOB NO:</b>
	<b>AGENT:</b>	<b>ORDER NO:</b>
	<b>DATE:</b>	<b>REVISIONS:</b>
		<b>DWG NO: FL w/EKD</b>